


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 3
DATE: 7-12-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 9-27-05

IN. S.P.C. E ZONE NAD '83
NAME: 16032402
N: 508192.4560(m)
E: 58642.0651(m)

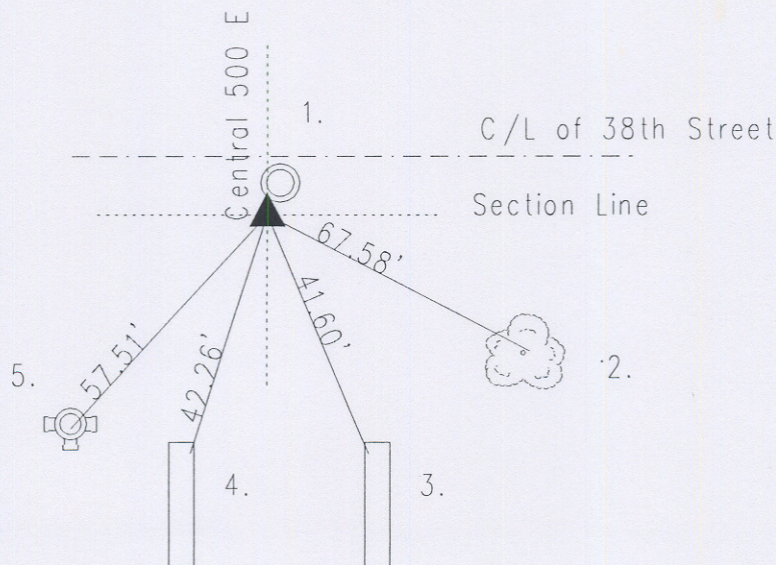

Original post set 1820 by Laughlin with witness: 10" beech N 21 W 10 links; 24" dogwood S 50 E 33 links per Marion County Atlas pg. 7. Hosbrook 4-10-1851 called no stone but witness: 28" walnut N 70 E 94 1/2 links; 26" beech N 48 1/4 W 101 links per Center Township Legal Survey Book pg. 5. J.W. Brown 11-9-1880 called following witness: 26" beech N 48 1/4 W 101 links; 28" walnut N 71 E 94 1/2 links and 30" walnut S 78 1/2 W 40 links per Center Township Legal Survey Book pg.5. In establishing this corner we used split and Washington Street Park Subdivision plat distances per Plat Book 9, pg. 172. Office of the Marion County Reorder. Legal surveys in this area were also used. 11-24-97 PK nail set by Wilcoxon. Re-tied 6-9-02 by Wilcoxon. Re-tied 9-27-05 by Wilcoxon.

16032402

REF.	DISTANCE	DESCRIPTION
1.	5.08'	Cut 'x' SW edge of sewer manhole rim
2.	67.58'	Mag nail w/bw SW spur root 10" locust tree
3.	41.60'	NW bolt in storm inlet
4.	42.26'	NF bolt in storm inlet
5.	57.51'	Top nut of fire hydrant